



Ammunition and Firearms



C-I-L shotguns



MODEL 401

Single shot takedown model in 12, 16, 20, 28 and 410 gauge. Chambered for all $2\frac{3}{4}$ " shells except 410 which is 3". Full choke, 30" barrel in 12 gauge; 28" in all other gauges. Length 44"-46". "Imbuia" wood stock with grooved fore-end.



MODEL 607

Slide action repeater in 12, 20 and 410 gauge. Chambered for all $2\frac{3}{4}$ " and 3" shells. In five combinations of gauge, barrel length and choke—12/30" full, 12/28" modified, 12/28" full, 20/28" full, and 410/26" full. Hammerless, side ejection action. Four shot magazine, with 3" shells one less. Length $45\frac{1}{2}$ "-47 $\frac{1}{2}$ ". Weight 7 lb. Walnut finish stock with pistol grip.



MODEL 621

Deluxe slide action repeater with ventilated rib in 12, 20 and 410 gauge. Chambered for all $2\frac{3}{4}$ " and 3" shells. Available as 12/26" improved cylinder, 12/28" modified or full, 12/30" full, 20/26" improved cylinder, 20/28" full, 410/26" full. Hammerless, side ejection action. Magazine takes four $2\frac{3}{4}$ " shells or three 3" shells. Length 45"-49" Weight 7 $\frac{1}{4}$ lb. Walnut finish stock, full pistol grip.



MODEL 710

Standard double barrel hammerless, in 12, 20 and 410 gauge. The 12 gauge is chambered for all $2\frac{3}{4}$ " shells; 20 and 410 gauge for 3" shells. Available as 12/28" modified and full, 12/30" modified and full, 20/28" modified and full, 410/26" full and full. Length $43\frac{3}{4}$ "-45 $\frac{3}{4}$ ", taken down 28"-30". Weight: 12 gauge 7 lb., 20 and 410 gauge 6 $\frac{1}{2}$ lb. Checkered walnut finish stock and fore-end, matted rib.



MODEL 725

Deluxe double barrel hammerless, in 12, 20, and 410 gauge. The 12 gauge is chambered for all $2\frac{3}{4}$ " shells; 20 gauge for $2\frac{3}{4}$ " and 3" magnum; 410 gauge for 3". Available as 12/28", modified and full, 12/30" modified and full, 20/28" modified and full, 410/26" full and full, modified and improved cylinder. Length $41\frac{3}{4}$ "-45 $\frac{3}{4}$ ", taken down 28"-30". Weight: 12 gauge 7 lb., 20 gauge 6 $\frac{1}{2}$ lb., 410 gauge 6 lb. Checkered walnut stock and fore-end. Raised ventilated rib. Automatic ejectors.

Fine Quality Firearms...

Whether you want a 22 for small game or target shooting, a centre fire hunting rifle, or a fast-handling shotgun, you'll find it in the selection provided by C-I-L.

All of the firearms shown on this page and on the front cover are backed by the famous C-I-L name—your guarantee of outstanding quality and high performance.

... and Accessories

The convenience of additional clips, and the accuracy of an especially fine micrometer peep sight will enhance your enjoyment of these fine C-I-L Firearms.

Clip Magazines:

Model 125—5 and 10 shot

Model 212—5 and 8 shot

Model 310—5 and 10 shot

Model 830—3 shot for 30-30 cal.

Model 830—4 shot for 222 cal.

Model 900—3 shot for 222 cal.

Micrometer Peep Sight:

Model 180

Available through your local dealer.



C-I-L centre fire and rim fire rifles

CENTRE FIRE RIFLES



MODEL 950

Custom grade, hi-power rifle in 243 Win., 270 Win., 30-06 Sprg. 308 Win., 7 mm. Rem. Mag. staggered box type magazine holds 4 cartridges (3 in 7 mm. mag.) plus one in chamber. Chrome-moly steel 22" barrel (7 mm. mag., stainless steel, length 24"). Overall length 43"-45". Weight 7-7 $\frac{3}{4}$ lb. Selected walnut Monte Carlo type stock with roll over cheek piece. Checkered pistol grip and fore-end. Receiver tapped for aperture sights and top-mount scopes.



MODEL 121

Deluxe bolt action, single shot rifle chambered for 22 Long Rifle, Long or Short cartridges. Barrel 22". Length 39". Weight 4 $\frac{1}{2}$ lb. Walnut finish Monte Carlo type stock with pistol grip. Hooded foresight; open, adjustable rear sight. Loading platform. Receiver grooved for scope mounting.



MODEL 900

Custom grade hi-power rifle in 222 Rem. calibre. Detachable 3-shot clip magazine plus one cartridge in chamber. Barrel 24". Length 43". Weight 6 $\frac{3}{4}$ lb. Hand-checked French walnut stock with hand-carved, roll-over cheek piece. Receiver drilled and tapped for top mount scope or aperture sight.



MODEL 125

Bolt action repeater with clip magazine. Chambered for 22 Long Rifle, Long or Short cartridges. Barrel 22". Length 39". Weight 4 $\frac{1}{2}$ lb. Walnut Monte Carlo type stock with pistol grip. Special hooded foresight; open adjustable rear sight. Receiver grooved for scope mounting.



MODEL 830

Hi-power rifle in 222 Rem. and 30-30 Win. calibres. Clip magazine holds 4 cartridges in 222, 3 cartridges in 30-30, plus one in chamber. Barrel: 222—24", 30-30—20". Length 38"-42". Weight 6 $\frac{1}{2}$ lb. Walnut finish stock with whiteline pistol grip cap and butt plate. Receiver drilled and tapped for side mount scopes.



MODEL 180


Bolt action, single shot rifle chambered for 22 Long Rifle, Long or Short cartridges. Barrel 24". Length 42". Weight 5 $\frac{1}{2}$ lb. Walnut finish Monte Carlo type stock with pistol grip. Hooded aperture foresight; rear adjustable peep sight. Receiver grooved for scope, drilled and tapped for micrometer peep sight. Adjustable trigger. Recommended for "Dominion Marksmen" sporting rifle competition.

RIM FIRE RIFLES



MODEL 212

Automatic with clip magazine. Chambered for 22 Long Rifle or Long cartridges. Barrel 24". Length 44". Weight 5 $\frac{3}{4}$ lb. Walnut finish, sporter stock. Bead front sight; open rear sight with elevator.

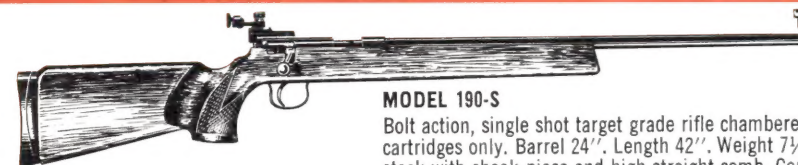

MODEL 190-S

Bolt action, single shot target grade rifle chambered for 22 Long Rifle cartridges only. Barrel 24". Length 42". Weight 7 $\frac{1}{2}$ lb. Monte Carlo stock with cheek-piece and high straight comb. Contoured, checkered pistol grip. Beavertail fore-end with long rail. Adjustable non-slip butt plate. Redfield globe front sight and Redfield Olympic target rear sight. (Model 190 supplied with .325 dovetail front sight base). Receiver grooved, drilled and tapped for micrometer sights. 3 lb. single stage adjustable trigger.



MODEL 227

Deluxe automatic with tubular magazine chambered for 22 Long Rifle, Long or Short cartridges. Barrel 24". Length 44". Weight 6 lb. Walnut finish Monte Carlo type stock with pistol grip. Hooded ramp gold bead front sight; open adjustable rear sight.



MODEL 310

Deluxe bolt action repeater chambered for 22 Long Rifle, Long or Short cartridges. Barrel 22". Length 42". Weight 5 $\frac{3}{4}$ lb. Walnut Monte Carlo type stock with cheek piece and pistol grip. Bead front sight; open adjustable rear sight. Receiver grooved for scope mounting. Adjustable trigger.

Fine Quality Firearms...

Whether you want a 22 for small game or target shooting, a centre fire hunting rifle, or a fast-handling shotgun, you'll find it in the selection provided by C-I-L.

All of the firearms shown on this page and on the front cover are backed by the famous C-I-L name—your guarantee of outstanding quality and high performance.

... and Accessories

The convenience of additional clips, and the accuracy of an especially fine micrometer peep sight will enhance your enjoyment of these fine C-I-L Firearms.

Clip Magazines:

Model 125—5 and 10 shot

Model 212—5 and 8 shot

Model 310—5 and 10 shot

Model 830—3 shot for 30-30 cal.

Model 830—4 shot for 222 cal.

Model 900—3 shot for 222 cal.


Micrometer Peep Sight:

Model 180


Available through your local dealer.




A complete line of quality C-I-L Shotshells in all gauges and shot sizes

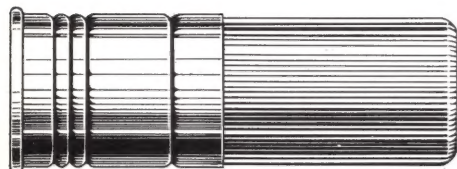


'IMPERIAL' SPECIAL LONG RANGE

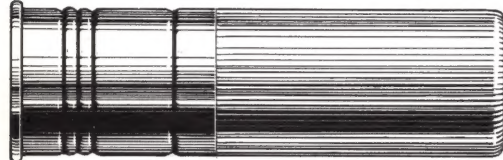


'IMPERIAL' MAGNUM

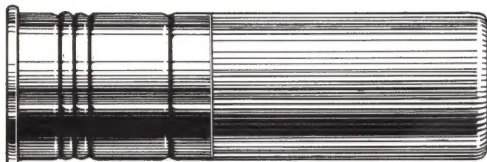


'IMPERIAL' SPECIAL LONG RANGE RIFLED SLUGS

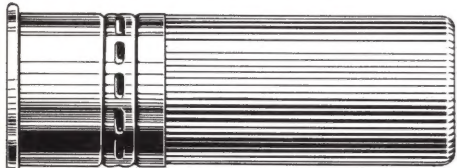

'MAXUM' LONG RANGE

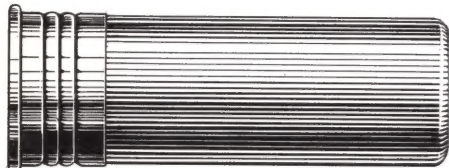

'CANUCK'

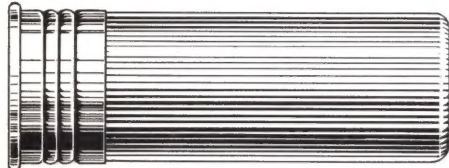

C-I-L TARGET LOADS

GA. Brand	Code	Shell Length in inches (a)	Drams equiv.	Shot oz.	Shot sizes
'IMPERIAL' SPECIAL LONG RANGE					
12 'Imperial' Special Long Range	IL	2¾	Max.	1¼	BB, 2, 4, 5, 6, 7½
16 'Imperial' Special Long Range	IT	2¾	3¼	1½	BB, 2, 4, 5, 6, 7½
20 'Imperial' Special Long Range	IM	2¾	2¼	1	BB, 2, 4, 5, 6, 7½
28 'Imperial' Special Long Range	IZ	2¾	2¼	¾	BB*, 2, 4, 6, 7½
410 'Imperial' Special Long Range	IR	2½	Max.	½	4, 5, 6, 7½, 9, 10*, 12*
'IMPERIAL' MAGNUM					
12 'Imperial' Magnum	PX	3	4½	1⅞	BB, 2, 4, 6
12 'Imperial' Magnum	IP	3	4¼	1⅞	BB, 2, 4, 5, 6
12 'Imperial' Magnum	LX	2¾	4	1½	BB, 2, 4, 5, 6
16 'Imperial' Magnum	TX	2¾	3½	1¼	BB, 2, 4, 5, 6
20 'Imperial' Magnum	IH	3	3¼	1¼	2, 4, 5, 6, 7½
20 'Imperial' Magnum	MX	2¾	3	1⅞	2, 4, 6
410 'Imperial' Magnum	IQ	3	Max.	¾	4, 5, 6, 7½, 9
BUCK SHOT LOADS					
12 'Imperial' Special Long Range	IL	2¾	Max.	34 (b)	AAA
12 'Imperial' Special Long Range	IL	2¾	Max.	12 (b)	SSG
12 'Imperial' Magnum	LX	2¾	Max.	12 (b)	Special SSG
12 'Imperial' Magnum	PX	3	Max.	15 (b)	Special SSG
16 'Imperial' Special Long Range	IT	2¾	3¼	12 (b)	SG
20 'Imperial' Special Long Range	IM	2¾	2¼	20 (b)	AAAA
28 'Imperial' Special Long Range	IZ	2¾	Max.	1 (b)	Slug
'POLY-KOR' SLUG LOADS (c)					
12 'Imperial' Special Long Range	IL	2¾	Max.	1	Stabilized Slug
RIFLED SLUG LOADS					
16 'Imperial' Special Long Range	IT	2¾	Max.	⅞	Rifled Slug
20 'Imperial' Special Long Range	IM	2¾	Max.	¾	Rifled Slug
28 'Imperial' Special Long Range	IZ	2¾	Max.	½	Rifled Slug
410 'Imperial' Special Long Range	IR	2½	Max.	½	Rifled Slug
'MAXUM' LONG RANGE*					
12 'Maxum' Long Range	LL	2¾	3¼	1¼	BB, 2, 4, 5, 6, 7½
'CANUCK'					
10 'Canuck' Standard	DSO	2¾	4¼	1¼	BB, 2, 4, 5, 6
12 'Canuck' Heavy	DN	2¾	3½	1½	BB, 2, 4, 5, 6, 7½
12 'Canuck' Standard	DA	2¾	3¼	1½	BB, 2, 4, 5, 6, 7½, 8*, 9, 10*
12 'Canuck' Standard	DC	2¾	3	1	4, 6, 7½, 9
16 'Canuck' Standard	DT	2¾	2¼	1	BB, 2, 4, 5, 6, 7½, 8, 9*
20 'Canuck' Standard	DM	2¾	2¼	¾	BB*, 2, 4, 5, 6, 7½, 8
C-I-L TARGET LOADS					
12 C-I-L Target Load	JX	2¾	3	1½	7½, 8, 9
12 C-I-L Target Load	JX	2¾	2¼	1½	7½, 8
12 C-I-L Target Load	JX	2¾	Light	1½	9
12 C-I-L Target Load	JE	2¾	3	1½	9
12 C-I-L Target Load	JE	2¾	Light	1½	9
12 C-I-L Target Load	JE	2¾	2½	1½	8
12 C-I-L Target Load	JXP	2¾	3¼	1¼	7½, 8
12 C-I-L Target Load	JP	2¾	3¼	1¼	7½
20 C-I-L Target Load	JM	2¾	¾	¾	9
28 C-I-L Target Load	JZ	2¾	¾	¾	9
410 C-I-L Target Load	JR	2½	½	½	9


(a) Shotshell Length = full length of shell when crimp has been opened out. Do not use a shell longer than the chamber of your gun.

(b) Number of pellets by actual count.

(c) 'Poly-Kor' Slug & Rifled Slug Loads are packed 5 to a box and 500 to a case. All other shotshells are packed 25 to a box and 500 to a case.

(d) C-I-L Target loads coded JX are loaded with "Ram-Wads".

*Discontinued when stocks depleted.



'Poly-Kor' the slug that streaks straight for the target.

The 'POLY-KOR' slug has a patented *compensating core* of C-I-L polythene which cushions and protects the slug from distortion as it is accelerated through the barrel and choke. The slug emerges stabilized, streaks straight for the target without wobbling or tumbling in flight.


'IMPERIAL' RIFLED AND 'POLY-KOR' SLUG SHOTSHELLS

Gauge and type	Weight Ounces	Velocity Feet per Second		Energy Ft. Lbs.		Mid-range trajectory	
		Muzzle	100 Yards	Muzzle	100 Yards	50 Yards	100 Yards
'Poly-Kor' 12	1	1600	950	2485	875	0.6"	3.1"
Rifled Slugs							
16	⅞	1600	950	2175	765	0.6"	3.1"
20	¾	1600	950	1555	550	0.6"	3.1"
28	½	1600	950	1245	440	6.0"	3.1"
410	¼	1830	1025	650	205	0.4"	2.5"

A complete line of rim fire cartridges for rifles, pistols, and revolvers



22 BB CAP 'SUPER-CLEAN'



22 SHORT 'CANUCK'



22 LONG RIFLE 'CANUCK'



22 SHORT 'IMPERIAL'



22 LONG 'IMPERIAL'



22 LONG RIFLE 'IMPERIAL'



22 LONG RIFLE C-I-L MATCH

SPECIAL SIZES



22 W.R.F. 'CANUCK'



22 WINCHESTER AUTO. 'CANUCK'



25 STEVENS SHORT 'CANUCK'



25 STEVENS LONG 'CANUCK'



32 SHORT 'CANUCK'



32 LONG 'CANUCK'


Description	Velocity	Lubricant	Bullet		Velocity Feet per Second		Energy Foot-Lbs.		Mid-Range Trajectory in inches for range of 100 Yds.
			Type (Lead)	Weight Grains	Muzzle	100 Yards	Muzzle	100 Yards	
22 BB CAP 'SUPER-CLEAN' For 22 calibre single shot rifles, pistols, and revolvers.	Standard	Graphite	Solid	18	780	—	24	—	—
22 SHORT (NON-SPLASHING GALLERY) 'SUPER-CLEAN' Manufactured specially for shooting galleries. For 22 calibre single shot and repeating rifles, pistols, and revolvers.	Standard	Dry Lub.	Solid	26	1045	—	63	—	—
22 SHORT 'CANUCK' For 22 calibre single shot, repeating and autoloading rifles, pistols, and revolvers.	Standard	Dry Lub.	Solid	29	1045	865	70	48	4.8
22 LONG RIFLE 'CANUCK' For all standard 22 calibre long rifle single shot, repeating and autoloading rifles, pistols, and revolvers.	Standard	Grease	Solid	40	1145	975	116	84	4.0
22 LONG RIFLE 'CANUCK' For all standard 22 calibre long rifle single shot, repeating and autoloading rifles, pistols, and revolvers.	Standard	Dry Lub.	Solid	40	1145	975	116	84	4.0
22 LONG RIFLE 'BISLEY' For all standard 22 calibre long rifle single shot, repeating and autoloading rifles, pistols, and revolvers.	Intermed.	Grease	Solid	40	1230	1010	134	91	3.6
22 SHORT 'IMPERIAL' For all standard 22 calibre single shot, repeating and autoloading rifles, pistols, and revolvers designed for high velocity cartridges.	High	Dry Lub.	Solid	29	1125	920	81	54	4.3
22 SHORT 'IMPERIAL' MUSHROOM For all standard 22 calibre single shot, repeating and autoloading rifles, pistols, and revolvers designed for high velocity cartridges.	High	Dry Lub.	Hollow Point	27	1155	920	80	51	4.2
22 LONG 'IMPERIAL' For all standard 22 calibre single shot and repeating rifles, pistols, and revolvers chambered for long rifle cartridges.	High	Dry Lub.	Solid	29	1240	965	99	60	3.8
22 LONG RIFLE 'IMPERIAL' For all standard 22 calibre long rifle single shot, repeating and autoloading rifles, pistols, and revolvers designed for high velocity cartridges.	High	Dry Lub.	Solid	40	1335	1045	158	97	3.3
22 LONG RIFLE 'IMPERIAL' MUSHROOM For all standard 22 calibre long rifle single shot, repeating and autoloading rifles, pistols, and revolvers designed for high velocity cartridges.	High	Dry Lub.	Hollow Point	36	1365	1040	149	86	3.3
22 LONG RIFLE C-I-L MATCH For all standard 22 calibre long rifle single shot and repeating rifles, pistols, and revolvers, but particularly for match rifles.	Low	Grease	Solid	40	—	—	—	—	—
22 LONG RIFLE C-I-L PISTOL MATCH For all 22 calibre long rifle, single shot and autoloading pistols, and revolvers, particularly those used in match pistol shooting.	Low	—	Solid	40	—	—	—	—	—
22 WINCHESTER RIM FIRE (W.R.F.) 'CANUCK' For Winchester Model 1890 and Remington Models 12 CS and 121 S repeating rifles; Winchester, Remington, and Stevens single shot rifles; also Colt revolvers chambered for this cartridge.	Standard	Graphite	Solid	45	1105	955	122	91	4.0
22 WINCHESTER AUTOMATIC 'CANUCK' For Winchester Model 1903 autoloading rifles.	Standard	Graphite	Solid	45	1055	930	111	86	4.6
25 STEVENS SHORT 'CANUCK' For Marlin, Stevens, Cooley, Remington, and Winchester single shot rifles.	Standard	Internal	Solid	65	945	845	129	103	5.6
25 STEVENS LONG 'CANUCK' For Marlin, Stevens, Cooley, Remington, and Winchester single shot rifles; also Stevens and Marlin repeating rifles.	Standard	Internal	Solid	65	1130	985	184	140	3.8
32 SHORT 'CANUCK' For the various revolvers, single shot pistols and single shot rifles of this calibre; also Marlin Model 1892 repeating rifle.	Standard	Dry Lub.	Solid	80	945	840	158	125	5.3
32 LONG 'CANUCK' For revolvers, single shot pistols and single shot rifles of this calibre; also Marlin Model 1892 repeating rifle.	Standard	Dry Lub.	Solid	80	1050	900	195	144	4.5

*Discontinued when stocks depleted.

'Dominion' centre fire pistol and revolver cartridges



25 (6.35 MM) AUTOMATIC



32 SMITH & WESSON



32 SMITH & WESSON LONG



32 SHORT COLT



32 (7.65 MM) AUTOMATIC




357 MAGNUM




9 MM LUGER



38 SMITH & WESSON




38 SPECIAL (METAL POINT)



38 SPECIAL HIGH VELOCITY POLICE



38 SPECIAL PISTOL MATCH (WAD CUTTER)



45 COLT




45 AUTOMATIC




455 COLT

Description	Bullet		Velocity Ft./Sec. Muzzle	Energy Ft. Lbs. Muzzle
	Type	Wt. Grs.		
25 (6.35 MM) AUTOMATIC For autoloading pistols designated 25 Auto., 25 Colt Auto., 25 ACP or 6.35 mm Browning.	MC	50	810	73
32 SMITH & WESSON For Smith & Wesson revolvers designated 32 or 32 Long, or in other revolvers designated 32 S & W, 32 S & W Long, 32 Police Positive or 32 Pocket Positive.	Lead	85	705	94
32 SMITH & WESSON LONG For Smith & Wesson revolvers designated 32 Long or in other revolvers designated 32 S & W Long, 32 Police Positive or 32 Pocket Positive. Note:—Interchangeable with 32 Colt New Police.	Lead	98	780	132
32 SHORT COLT For revolvers designated 32 Short Colt, 32 Long Colt or Calibre 320. May also be used in Marlin Model 1892 rifles.	Lead	80	795	112
32 (7.65 MM) AUTOMATIC For autoloading pistols designated 32 Auto., 32 Colt Auto., 32 ACP or 7.65 mm Browning. Note:—Not interchangeable with 7.65 mm Luger.	MC	71	960	145
357 MAGNUM For revolvers designated 357 Magnum.	MP	158	1400	690
9 MM LUGER For 9 mm German Luger Automatic pistols and other autoloading pistols chambered for the 9 mm Luger cartridge. Note:—(1) Not interchangeable with 9 mm Browning or other 9 mm ammunition. (2) Do not use 9 mm Sten Gun (Military) Cartridges in your pistol.	MC	124	1120	345
9 MM LUGER (POLICE) For 9 mm Sten Gun and other autoloading sub-machine guns chambered for the 9 mm Luger cartridge.	MC	124	1120	345
38 SMITH & WESSON For revolvers designated 38 S & W, 38 Police Positive, 38 Bankers' Special or British Service Revolver No. 2. Note:—Interchangeable with 38 Colt New Police.	Lead	145	685	152
38 SPECIAL (LEAD) For revolvers designated 38 Special, 38 S & W Special, 38/44 or Officer's Model 38. Will also fit guns chambered for 357 Magnum cartridge.	Lead	158	855	255
38 SPECIAL (METAL POINT) For revolvers designated 38 Special, 38 S & W Special, 38/44 or Officer's Model 38. Will also fit guns chambered for 357 Magnum cartridge.	MP	158	855	255
38 SPECIAL HIGH VELOCITY POLICE For revolvers designated 38 Special, 38 S & W Special, 38/44 or Officer's Model 38. Will also fit guns chambered for the 357 Magnum cartridge. Note:—Use only in revolvers in good repair.	Lead	158	1090	415
38 SPECIAL PISTOL MATCH For revolvers designated 38 Special, 38 S & W Special, 38/44 or Officer's Model 38, 38 Special Mid-Range. Will also fit guns chambered for 357 Magnum cartridge.	WC	148	770	195
45 COLT For revolvers designated 45 calibre.	Lead	250	855	410
45 AUTOMATIC For autoloading pistols designated 45 ACP, 45 Automatic Colt, 45 Automatic Colt Government Model, 45 Colt Automatic Government Model.	MC	230	850	370
455 COLT For revolvers designated 455, 455 Eley, 455 Webley MK II or British Service Revolver No. 1.	Lead	265	770	349


Pistol and revolver bullet types for every need



Lead: Long-time favourite for police work and target shooting. Available in 32 Smith & Wesson, 32 Smith & Wesson Long, 32 Short Colt, 38 Smith & Wesson, 38 Special, 45 Colt and 455 Colt.




Wad Cutter: Sharp shouldered bullet designed for outstanding accuracy in target shooting. Cuts a clean hole in the target to make scoring easier. Loaded in 38 Special calibre at reduced velocity for minimum recoil and muzzle flip.



Metal Point: Special police bullet for high velocity 357 Magnum and 38 Special cartridges. Provides maximum penetration of steel, iron and other metals.



Metal Cased: Provides maximum penetration and trouble-free functioning in autoloading pistols. Available in 25 Automatic, 32 Automatic, 9 mm Luger and 45 Automatic Calibres.



38 Special High Velocity Police: A special design with power and flat nose construction to suit the needs of law enforcement agencies.

'Dominion' centre fire cartridges

BALLISTICS AND RANGE TABLES


BALLISTICS

Description	Bullet		Velocity in Feet per Second						
	Wt. Grains	Type	Muzzle	100 Yds.	200 Yds.	300 Yds.	400 Yds.	500 Yds.	Muzzle
22 HORNET For rifles designated 22 Hornet, 5.6 x 35 R or 22 x 36 HO.	45	PSP	2690	2030	1510	1150	—	—	720
22 SAVAGE For rifles designated 22 Savage or 22 High Power.	70	PSP	2800	2440	2110	1840	—	—	1220
222 REMINGTON For rifles designated 222 Remington.	50	PSP	3200	2600	2170	1750	—	—	1140
243 WINCHESTER For rifles designated 243 Winchester.	75	PSP	3500	3070	2660	2290	1960	1670	2040
	100	PSP	3070	2790	2540	2320	2120	1940	2090
244 REMINGTON For rifles designated 244 Remington.	75	PSP	3500	3070	2660	2290	1960	1670	2040
6.5 x 53 MM MANNLICHER-SCHOENAUER For sporting and military rifles of the Mannlicher-Schoenauer Model 1903 pattern. This calibre is also designated as 6.5 x 53 M-Sch., 6.5 x 54 M-Sch., or 6.7 mm M-Sch. Note:—Not interchangeable with other types of 6.5 mm ammunition.	160	SP	2160	1950	1750	1570	—	—	1660
6.5 x 55 MM For use in 6.5 x 55 mm Norwegian Krag and Swedish Mauser rifles or others designated as 6.5 x 55 mm. Note:—Not interchangeable with other types of 6.5 mm ammunition.	160	SP	2420	2190	1960	1760	1580	1420	2080
25-20 WINCHESTER For rifles designated 25-20 Winchester, 25-20 W.C.F., 25-20 Marlin or 25-20. Note:—Not for use in revolvers.	86	SP	1460	1180	1030	940	—	—	405
25-35 WINCHESTER For rifles designated 25-35 Winchester or 25-35 W.C.F.	117	SP	2300	1910	1600	1340	—	—	1370
250 SAVAGE For rifles designated 250 Savage or 250-3000 Savage.	100	PSP	2820	2460	2140	1870	—	—	1760
257 ROBERTS For rifles designated 257 Roberts.	117	PSP	2650	2280	1950	1690	—	—	1820
270 WINCHESTER For rifles designated 270 Winchester or 270 W.C.F.	100	PSP	3480	3070	2690	2340	2010	1700	2690
	130	PSP	3140	2850	2580	2320	2090	1860	2840
	150	ST	2900	2620	2380	2160	1970	1800	2800
7 x 57 MM MAUSER For rifles designated 7 mm Mauser or 7 x 57.	160	KKSP	2800	2530	2280	2050	1840	—	2790
	139	PSP	2800	2500	2240	1990	1770	1580	2420
	160	KKSP	2650	2330	2040	1780	1550	1350	2500
KKSP—'Kling-Kor' Soft Point PSP—Pointed Soft Point SP—Soft Point CPE—Copper Point Expanding MC—Metal Cased (Hard Point) PNEU—Pneumatic HP—Hollow Point ST—'Sabretip'									


Color indicates weight of bullet illustrated




22 HORNET



22 SAVAGE




222 REMINGTON




243 WINCHESTER




244 REMINGTON



6.5 x 53 MANNLICHER-SCHOENAUER



6.5 x 55 MM



25-20 WINCHESTER



25-35 WINCHESTER




250 SAVAGE



257 ROBERTS



270 WINCHESTER



7 x 57 MM MAUSER

In all popular calibres, bullet weights and types

RANGE TABLE—VALUES SHOWN IN THIS TABLE ARE BASED ON A SIGHT HEIGHT 1½" ABOVE LINE OF BORE

Comparative Performance. Figures below are for a sight-setting of 100 yards and permit a comparison of trajectories up to 200 yards.

RECOMMENDED SIGHTING: ⊕ Indicates the most favourable sighting range in order to minimize the sighting problem at shorter and longer ranges.
+ Indicates inches high; — Indicates inches low.

Energy in Foot Pounds					Inches High 50 Yds.	Sighted in at 100 Yds.	Inches Low 200 Yds.	First Crosses Line of Sight App. Yds.	50 Yds.	75 Yds.	100 Yds.	125 Yds.	150 Yds.	200 Yds.	250 Yds.	300 Yds.	400 Yds.	500 Yds.
100 Yds.	200 Yds.	300 Yds.	400 Yds.	500 Yds.														
410	230	130	-	-	0.0	⊕	7.0	29.0	-	+1.5	-	-	⊕	-4.0	-	-	-	-
925	690	525	-	-	0.0	⊕	4.5	25.0	-	-	+2.0	-	-	⊕	-4.5	-	-	-
785	520	340	-	-	0.0	⊕	3.5	30.0	-	-	+2.0	-	-	⊕	-3.5	-	-	-
1570	1180	875	640	465	-0.3	⊕	2.5	30.0	-	-	-	+2.5	-	-	⊕	-3.0	-15.5	-36.5
1730	1430	1190	995	835	-0.3	⊕	3.0	27.5	-	-	-	+3.0	-	-	⊕	-3.5	-16.5	-35.5
1570	1180	875	640	465	-0.3	⊕	2.5	30.0	-	-	-	+2.5	-	-	⊕	-3.0	-15.5	-36.5
1350	1090	875	-	-	0.3	⊕	7.5	25.5	-	+1.5	-	-	⊕	-4.0	-	-	-	-
1700	1360	1110	885	715	0.3	⊕	6.5	21.0	-	-	+3.5	-	-	⊕	-5.0	-13.0	-39.0	-
265	200	170	-	-	2.0	⊕	24.0	16.0	+2.0	-	⊕	-4.0	-	-	-	-	-	-
945	665	465	-	-	0.2	⊕	7.5	23.0	-	+1.5	-	-	⊕	-4.5	-	-	-	-
1340	1020	775	-	-	0.0	⊕	4.0	27.5	-	-	+2.0	-	-	⊕	-3.5	-	-	-
1350	985	740	-	-	0.0	⊕	5.0	24.0	-	-	+2.5	-	-	⊕	-4.5	-	-	-
2090	1600	1215	890	640	-0.3	⊕	2.0	31.5	-	-	-	+2.5	-	-	⊕	-3.5	-14.5	-33.5
2340	1920	1550	1260	1000	-0.2	⊕	2.5	27.5	-	-	-	+3.0	-	-	⊕	-4.0	-16.0	-35.5
2290	1890	1550	1290	1080	0.0	⊕	3.5	24.5	-	-	-	3.5	-	-	⊕	-4.0	-18.0	-41.0
2270	1850	1490	1200	-	-0.2	⊕	4.5	28.5	-	-	+2.0	-	-	⊕	-4.0	-	-25.0	-
1930	1550	1220	965	770	-0.4	⊕	3.5	27.0	-	-	-	+4.0	-	-	⊕	-4.5	-18.5	-41.0
1930	1480	1130	855	645	-0.2	⊕	4.5	29.0	-	-	+2.5	-	-	⊕	-4.0	-	-28.5	-

'Dominion' centre fire bullet types



'Sabretip': A thick-jacketed bullet with a tough, durable nylon tip that will not deform on feeding. Unique construction ensures smooth chambering, excellent expansion and fine accuracy. One of the best bullets for big game hunting in North America.



'Kling-Kor' Soft Point: Unseen notches securely grip bullet core; act as barbs to arrest any tendency to strip or disintegrate on impact with target. Thin tongues of lead extruded through notches provide locking action at exact moment it is most needed.



Pointed Soft Point: High velocity and flattened trajectory reduce sighting problem. Accurate with excellent mushrooming qualities.



Soft Point: Jacketed in metal with a round or flat lead nose, the Soft Point is a dependable favourite for the lower velocity calibres.



Copper Point Expanding: Special nose construction provides excellent penetrating and mushrooming qualities. Sustained high velocity reduces problem of range estimation and sight adjustment. A favourite in open country.




Pneumatic: Enclosed air pocket and specially designed jacket promote rapid mushrooming and shocking power.




Hollow Point: Rapid mushrooming and high shocking power combined with excellent accuracy and flat trajectory make this an attractive varmint bullet.



Metal Cased (Hard Point): For maximum penetration without mushrooming to avoid spoiling the pelts of valuable fur-bearing animals.




7 MM REMINGTON MAGNUM




30-30 WINCHESTER



30 REMINGTON



30-40 KRAG




30-06 SPRINGFIELD




300 WINCHESTER MAGNUM



300 HOLLAND & HOLLAND MAGNUM




300 SAVAGE




303 SAVAGE




303 BRITISH



308 WINCHESTER



8 MM MAUSER



32-20 WINCHESTER

'Dominion' centre fire cartridges

BALLISTICS AND RANGE TABLES

BALLISTICS

Description	Bullet		Velocity in Feet per Second						
	Wt. Grains	Type	Muzzle	100 Yds.	200 Yds.	300 Yds.	400 Yds.	500 Yds.	Muzzle
7 MM REMINGTON MAGNUM For rifles designated 7 mm Remington Magnum, 7 mm Rem. Magnum, and 7 mm Rem. Mag. Note:—Not interchangeable with other 7 mm cartridges.	175	SP	3070	2720	2400	2120	1870	1640	3660
30-30 WINCHESTER For rifles designated 30-30 Winchester, 30 W.C.F. or 30-30.	150	PNEU	2410	2020	1700	1430	—	—	1930
	170	KKSP	2220	1890	1630	1410	—	—	1860
	170	ST	2220	1890	1630	1410	—	—	1860
	170	MC	2220	1890	1630	1410	—	—	1860
	150	ST	2410	2020	1700	1430	—	—	1930
30 REMINGTON For rifles designated 30 Remington.	170	KKSP	2120	1820	1560	1350	—	—	1700
30-40 KRAG For rifles designated 30-40 Krag, 30 Army, 30 U.S.A. or 30-40.	180	KKSP	2470	2120	1830	1590	1400	—	2440
30-06 SPRINGFIELD For sporting and military rifles designated 30-06 Springfield, 30 Springfield, Springfield Model 1903, Enfield Model 1917, U.S. 30-06, Springfield 30 Cal. 1906, or 30 Gov't '06.	130	HP	3150	2730	2470	2170	1920	1690	2870
	150	PSP	2970	2670	2400	2130	1890	1670	2930
	150	ST	2970	2670	2400	2130	1890	1670	2930
	180	KKSP	2700	2330	2010	1740	1520	—	2910
	180	CPE	2700	2480	2280	2080	1900	1730	2910
	180	ST	2700	2470	2250	2040	1850	1670	2910
	220	KKSP	2410	2120	1870	1670	1480	—	2830
300 WINCHESTER MAGNUM For rifles designated 300 Winchester Magnum	180	ST	3070	2850	2640	2440	2250	2060	3770
300 HOLLAND & HOLLAND MAGNUM For rifles designated 300 H & H Magnum and 300 H & H Mag.	180	PSP	2920	2670	2440	2220	2020	1830	3400
300 SAVAGE For rifles designated 300 Savage.	150	PSP	2670	2390	2130	1890	1660	—	2370
	150	ST	2670	2390	2130	1890	1660	—	2370
	180	KKSP	2370	2040	1760	1520	1340	—	2240
	180	ST	2370	2160	1960	1770	1600	—	2240
303 SAVAGE For rifles designated 303 Savage. Note:—Not interchangeable with 303 British.	190	KKSP	1980	1680	1440	1250	—	—	1650
303 BRITISH For sporting and military rifles designated 303 British, 303 Ross, No. 1 Mark III (S.M.L.E.), No. 3 Mark I (Enfield Pattern '14), No. 4 Mark I, and No. 5 Mark I. Note:—Not interchangeable with 303 Savage.	150	PSP	2720	2420	2150	1900	1670	1470	2460
	150	ST	2720	2420	2150	1900	1670	1470	2460
	180	KKSP	2540	2180	1860	1590	1360	—	2580
	180	CPE	2540	2330	2130	1940	1760	1600	2580
	180	ST	2540	2300	2090	1900	1730	1580	2580
	215	KKSP	2180	1900	1660	1460	1250	—	2270
308 WINCHESTER For rifles designated 308 Winchester or 7.62 mm NATO.	130	HP	2930	2590	2290	2010	1770	1560	2480
	150	PSP	2860	2570	2300	2050	1810	1590	2730
	150	ST	2860	2570	2300	2050	1810	1590	2730
	180	KKSP	2610	2240	1920	1640	1400	—	2720
	180	ST	2610	2390	2170	1970	1780	1600	2720
	200	KKSP	2450	2210	1980	1770	1580	1410	2670
8 MM MAUSER For rifles of the German Model 1898 pattern. This calibre is also designated 8 x 57 Mauser, 7.9 mm Mauser and 7.92 mm Mauser. Note:—(1) Not interchangeable with 8 mm Mannlicher-Schoenauer. (2) Not recommended for use in arms of the Model 1888 Mauser pattern.	170	PSP	2570	2300	2040	1810	1600	—	2490
32-20 WINCHESTER For rifles designated 32-20 Winchester, 32 W.C.F. or 32-20. Note:—(1) Not for use in revolvers. (2) Not interchangeable with 32 Winchester Special.	115	SP	1480	1220	1050	940	—	—	560

Color indicates weight of bullet illustrated

KKSP—'Kling-Kor' Soft Point MC—Metal Cased (Hard Po
PSP—Pointed Soft Point PNEU—Pneumatic
SP—Soft Point HP—Hollow Point
CPE—Copper Point Expanding ST—'Sabretin'

continued

RANGE TABLE—VALUES SHOWN IN THIS TABLE ARE BASED ON A SIGHT HEIGHT 1½" ABOVE LINE OR BORE

Comparative Performance. Figures below are for a sight-setting of 100 yards and permit a comparison of trajectories up to 200 yards.

RECOMMENDED SIGHTING: ⊕ Indicates the most favourable sighting range in order to minimize the sighting problem at shorter and longer ranges.
+ Indicates inches high; — Indicates inches low.

Energy in Foot Pounds					Inches High 50 Yds.	Sighted in at 100 Yds.	Inches Low 200 Yds.	First Crosses Line of Sight App. Yds.	50 Yds.	75 Yds.	100 Yds.	125 Yds.	150 Yds.	200 Yds.	250 Yds.	300 Yds.	400 Yds.	500 Yds.
100 Yds.	200 Yds.	300 Yds.	400 Yds.	500 Yds.														
2870	2240	1750	1360	1040	0.2	⊕	3.5	25.0	-	-	-	+3.5	-	-	⊕	-4.0	-18.0	-43.0
1360	960	680	-	-	0.2	⊕	7.0	27.0	-	+1.5	-	-	⊕	-4.0	-	-	-	-
1350	1000	750	-	-	0.2	⊕	8.0	23.0	-	+1.5	-	-	⊕	-4.5	-	-	-	-
1350	1000	750	-	-	0.2	⊕	8.0	23.0	-	+1.5	-	-	⊕	-4.5	-	-	-	-
1350	1000	750	-	-	0.2	⊕	8.0	23.0	-	+1.5	-	-	⊕	-4.5	-	-	-	-
1360	960	680	-	-	0.2	⊕	7.0	27.0	-	+1.5	-	-	⊕	-4.0	-	-	-	-
1250	920	690	-	-	0.4	⊕	9.0	20.0	-	+2.0	-	-	⊕	-5.0	-	-	-	-
1790	1340	1010	785	-	0.0	⊕	6.0	21.0	-	-	+3.0	-	-	⊕	-5.5	-	-41.0	-
2160	1770	1360	1060	820	-0.3	⊕	3.0	27.0	-	-	-	+3.0	-	-	⊕	-4.0	-19.5	-47.0
2370	1920	1510	1190	930	-0.2	⊕	3.5	25.0	-	-	-	+3.5	-	-	⊕	-4.0	-17.5	-41.0
2370	1920	1510	1190	930	-0.2	⊕	3.5	25.0	-	-	-	+3.5	-	-	⊕	-4.0	-17.5	-41.0
2170	1610	1210	920	-	0.0	⊕	5.0	24.0	-	-	+2.5	-	-	⊕	-4.0	-	-32.5	-
2460	2080	1730	1440	1190	0.0	⊕	4.5	21.0	-	-	-	+4.0	-	-	⊕	-4.5	-20.5	-46.0
2440	2020	1660	1370	1110	0.1	⊕	4.5	20.0	-	-	-	+4.0	-	-	⊕	-4.5	-21.0	-48.5
2190	1710	1360	1070	-	0.1	⊕	6.0	21.0	-	-	+3.0	-	-	⊕	-5.5	-	-41.0	-
3250	2790	2380	2020	1700	0.3	⊕	3.0	27.5	-	-	-	+3.0	-	-	⊕	-3.5	-14.5	-32.5
2850	2380	1970	1630	1340	-0.1	⊕	3.0	25.0	-	-	-	+3.5	-	-	⊕	-4.0	-17.5	-39.0
1900	1510	1190	915	-	0.0	⊕	4.5	26.0	-	-	+2.5	-	-	⊕	-3.5	-	-29.0	-
1900	1510	1190	915	-	0.0	⊕	4.5	26.0	-	-	+2.5	-	-	⊕	-3.5	-	-29.0	-
1660	1240	920	715	-	0.2	⊕	7.0	20.0	-	-	+3.5	-	-	⊕	-5.5	-	-43.0	-
1860	1530	1250	1020	-	0.0	⊕	6.0	21.5	-	-	+3.0	-	-	⊕	-5.5	-	-35.0	-
1190	875	660	-	-	0.7	⊕	10.5	17.5	-	-	+3.0	-	-	⊕	-5.5	-	-	-
1950	1540	1200	930	720	-0.2	⊕	4.5	22.0	-	-	-	+4.5	-	-	⊕	-5.0	-23.0	-53.5
1950	1540	1200	930	720	-0.2	⊕	4.5	22.0	-	-	-	+4.5	-	-	⊕	-5.0	-23.0	-53.5
1900	1380	1010	740	-	0.0	⊕	6.0	23.0	-	-	+3.0	-	-	⊕	-5.0	-	-41.0	-
2170	1810	1500	1240	1020	0.0	⊕	5.0	19.0	-	-	-	+4.5	-	-	⊕	-5.0	-23.0	-52.5
2120	1750	1440	1200	1000	0.5	⊕	5.1	17.5	-	-	-	+5.0	-	-	⊕	-5.5	-26.5	-71.0
1720	1310	1020	750	-	0.3	⊕	9.0	16.0	-	-	+4.5	-	-	⊕	-7.0	-	-54.0	-
1940	1520	1170	905	700	-0.1	⊕	4.0	23.5	-	-	-	+3.5	-	-	⊕	-4.5	-23.5	-59.0
2200	1760	1400	1090	840	-0.1	⊕	4.0	25.0	-	-	-	+3.5	-	-	⊕	-4.5	-20.0	-47.5
2200	1760	1400	1090	840	-0.1	⊕	4.0	25.0	-	-	-	+3.5	-	-	⊕	-4.5	-20.0	-47.5
2010	1470	1070	785	-	0.0	⊕	5.5	23.0	-	-	+3.0	-	-	⊕	-5.5	-	-38.0	-
2280	1870	1540	1260	1010	-0.4	⊕	4.5	22.0	-	-	-	+4.5	-	-	⊕	-5.0	-21.5	-51.5
2170	1750	1400	1110	875	0	⊕	6.0	22.0	-	-	+3.0	-	-	⊕	-5.0	-12.0	-35.0	-73.0
2000	1570	1240	965	-	0.0	⊕	5.5	22.5	-	-	+3.5	-	-	⊕	-5.5	-	-33.5	-
380	280	225	-	-	2.0	⊕	22.0	16.5	+2.0	-	⊕	-3.5	-	-	-	-	-	-

'Sabretip' bullets

With its thick jacket and tough nylon point, the new 'Sabretip' bullet combines the excellent performance of soft point bullets with the smooth functioning and resistance to tip damage of hard point bullets. Rough handling, recoil in magazines, even feeding through military type actions can't damage the 'Sabretip' nylon point. It is smooth feeding, flat shooting, deadly accurate and mushrooms as effectively as a soft point bullet, at all hunting ranges. Extensive field and laboratory tests have proved it to be one of the best bullets for big-game hunting in North America. Available in 30.06 Springfield, 300 Savage, 303 British and 308 Winchester in 150 and 180 grains, and 30-30 Winchester in 150 and 170 grains.

Dominion 'Kling-Kor' soft point bullets


DOMINION 'Kling-Kor' Soft Point Bullets were developed by C-I-L to solve a problem which had plagued ammunition makers for years.

The Problem: How to prevent bullet jackets from separating from their lead cores at impact.

The Solution: A series of notches (hidden under the case neck) ringing the jacket which securely rivet the lead core and copper alloy jacket together. These notches act as claws to arrest any tendency to strip or disintegrate on contact with the target. Other features include high quality brass construction and extra-clean, oilproof primers. DOMINION 'Kling-Kor' Bullets are available in 270 Win., 7 x 57 mm Mauser, 30-30 Win., 30 Rem., 30-40 Krag, 30.06 Spring., 300 Sav., 303 Sav., 303 Br., 308 Win., 32 Win. Spec., 32 Rem., 32-40 Win., 358 Win.

'Dominion' centre fire cartridges


BALLISTICS AND RANGE TABLES



32 WINCHESTER SPECIAL




32 REMINGTON



32-40 WINCHESTER




35 REMINGTON




351 WINCHESTER SELF-LOADING




358 (8.8 MM) WINCHESTER




38-40 WINCHESTER



38-55 WINCHESTER



43 (11 MM) MAUSER



44-40 WINCHESTER



44 REMINGTON MAGNUM

BALLISTICS

Description	Bullet		Velocity in Feet per Second						Muzzle
	Wt. Grains	Type	Muzzle	100 Yds.	200 Yds.	300 Yds.	400 Yds.	500 Yds.	
32 WINCHESTER SPECIAL For rifles designated 32 Winchester Special, 32 W.S., 32 Winchester or 32 Special. Note:—Not interchangeable with 32-20 Winchester.	170	KKSP	2280	1920	1630	1410	—	—	1960
32 REMINGTON For rifles designated 32 Remington.	170	KKSP	2120	1800	1540	1340	—	—	1700
32-40 WINCHESTER For all rifles designated 32-40.	170	KKSP	1540	1340	1170	1050	—	—	895
35 REMINGTON For rifles designated 35 Remington, 35 Remington Automatic or 35 Browning Automatic.	200	SP	2100	1710	1390	1160	—	—	1950
351 WINCHESTER SELF-LOADING For Winchester Model '07 Self-Loading rifles.	180	SP	1850	1560	1310	1140	—	—	1370
358 (8.8 MM) WINCHESTER For rifles designated 358 Winchester.	200	KKSP	2530	2210	1910	1640	1400	—	2840
38-40 WINCHESTER For rifles designated 38-40 Winchester, 38-W., or 38 W.C.F. Note:—Not for use in revolvers.	180	SP	1330	1070	960	850	—	—	705
38-55 WINCHESTER For all rifles designated 38-55. Note:—Not interchangeable with 38-56 W.C.F.	255	SP	1600	1410	1240	1110	—	—	1450
43 (11 MM) MAUSER For rifles designated 43 Mauser or 11 mm Mauser. Note:—Not for use in rifles designated 11 mm Spanish, 43 Spanish or 43 Egyptian.	385	LEAD	1360	1150	1030	940	—	—	1580
44-40 WINCHESTER For rifles designated 44-40 Winchester, 44 W.C.F. or 44 W. Note:—Not for use in revolvers.	200	SP	1310	1050	940	830	—	—	760
44 REMINGTON MAGNUM For rifles designated 44 Remington Magnum. Also suitable for revolvers chambered for this calibre. Note:—Do not use in 410 GA shotguns.	240	SP	1850	1450	1150	980	—	—	1820

KKSP—'Kling-Kor' Soft Point
PSP—Pointed Soft Point
SP—Soft Point
CPE—Copper Point Expanding
MC—Metal Cased (Hard Point)
PNEU—Pneumatic
HP—Hollow Point
ST—'Sabretip'

Miscellaneous items and special ammunition

C-I-L also manufactures blank cartridges, blank shotshells, shot cartridges, 'Super-Clean' primers and empty primed shotshells. Included are:

BLANK SHOTSHELLS

10 gauge with black powder
12 gauge with black powder
12 gauge with smokeless powder

BLANK CARTRIDGES

22 Short rim fire blank
32 Smith & Wesson centre fire blank
38 Smith & Wesson centre fire blank
38 Special centre fire blank
45 Colt centre fire blank

continued

RANGE TABLE—VALUES SHOWN IN THIS TABLE ARE BASED ON A SIGHT HEIGHT 1½" ABOVE LINE OR BORE

Comparative Performance. Figures below are for a sight-setting of 100 yards and permit a comparison of trajectories up to 200 yards.

RECOMMENDED SIGHTING: ⊕ Indicates the most favourable sighting range in order to minimize the sighting problem at shorter and longer ranges.
+ Indicates inches high; — Indicates inches low.

Energy in Foot Pounds					Inches High 50 Yds.	Sighted in at 100 Yds.	Inches Low 200 Yds.	First Crosses Line of Sight App. Yds.	50 Yds.	75 Yds.	100 Yds.	125 Yds.	150 Yds.	200 Yds.	250 Yds.	300 Yds.	400 Yds.	500 Yds.
100 Yds.	200 Yds.	300 Yds.	400 Yds.	500 Yds.														
1390	1000	750	—	—	0.3	⊕	8.0	23.0	—	+2.0	—	—	⊕	—4.5	—	—	—	—
1220	895	680	—	—	0.5	⊕	9.0	20.0	—	+2.0	—	—	⊕	—5.0	—	—	—	—
680	515	415	—	—	1.0	⊕	18.5	21.0	+1.0	—	⊕	—2.5	—	—	—	—	—	—
1300	865	605	—	—	0.5	⊕	10.5	19.5	—	+2.5	—	—	⊕	—6.0	—	—	—	—
975	685	520	—	—	0.8	⊕	14.0	16.0	—	+3.0	—	—	⊕	—7.5	—	—	—	—
2160	1610	1190	870	—	0.1	⊕	6.0	20.5	—	—	+3.0	—	—	⊕	—5.0	—	—38.5	—
455	370	290	—	—	2.5	⊕	29.0	14.5	+2.5	—	⊕	—4.0	—	—	—	—	—	—
1130	880	700	—	—	1.0	⊕	17.0	13.5	—	+4.0	—	—	⊕	—8.5	—	—	—	—
1130	910	750	—	—	2.0	⊕	24.0	16.0	+2.0	—	⊕	—3.5	—	—	—	—	—	—
490	390	305	—	—	3.0	⊕	30.0	12.5	+3.0	—	⊕	—4.5	—	—	—	—	—	—
1120	710	510	—	—	1.4	⊕	15.5	13.0	—	+4.5	—	—	⊕	—8.0	—	—	—	—

SHOT CARTRIDGES

22 Long Rifle 'Whiz-Bang' rim fire shot (No. 12 shot).
44-40 Winchester shot (No. 7½ shot)—For I.X.L. and other shotguns but may be used in rifles designated 44-40 Win., 44 W.C.F., or 44 W.

Note:—Not for use in revolvers.

COMPONENTS

C-I-L makes available a complete line of quality, hand-loading components. For an illustrated retail price guide contact your nearest C-I-L component dealer or write Canadian Industries Limited, Ammunition and Firearms, P.O. Box 10, Montreal, Que.

'Dominion Marksmen' program

Shooting is one of the most highly organized sports in Canada with regulating bodies at national, provincial and often municipal levels. At the same time, 'Dominion Marksmen' operates a nation-wide program of competitions without charge. Boy Scouts, civic and service clubs, veterans' organizations, police and fire departments, churches, community recreation departments, gun clubs, conservation groups and agencies—these and many other notable organizations sponsor shooting programs. Nearly all of them are affiliated with 'Dominion Marksmen'.

Write to 'Dominion Marksmen', P.O. Box 10, Montreal, for information on its competitions, booklets, free films, and answers to questions on the shooting sports.

Official competition targets, for use at all recognized ranges with pistols and small bore rifles, are available from the Shooting Federation of Canada, P.O. Box 635, Station B, Montreal. Write to the Shooting Federation of Canada for information and prices.

C-I-L supplies three targets for sighting-in rifles and informal shooting.


C-I-L 100 yard Sighting-In Target

C-I-L 25 yard Practice Target

C-I-L Good Luck Target


Dealers may purchase these targets through their distributors or directly from Dominion Marksmen, P.O. Box 10, Montreal.

The 'Dominion Marksman' program is available to residents of Canada only.

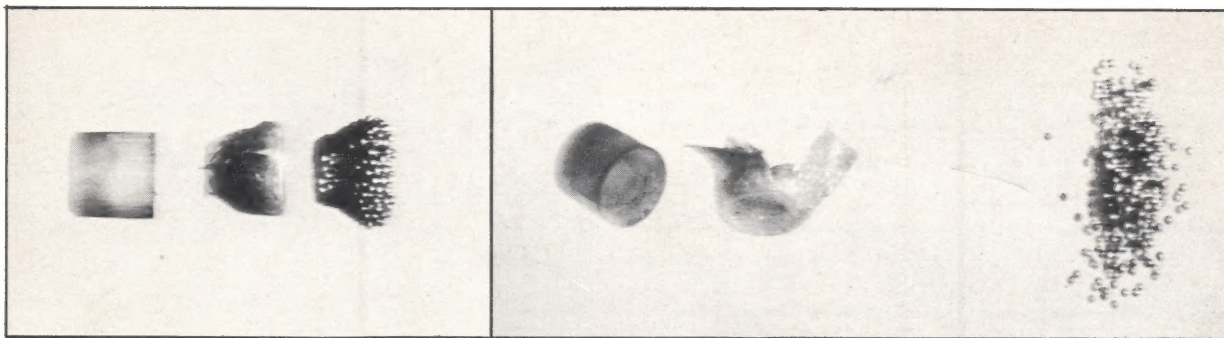

(Left) Ram-Wad and #9 shot charge photographed at 2 1/2 feet from *skeet choked* test barrel. (Right) Same components, 5 1/2 feet from muzzle.

SKEET PATTERN: *Photographs taken at high speed show thick, expanded cluster of shot in flight. An excellent pattern for skeet shooting. New C-I-L Ram-Wads actually help control the dispersion of shot.*

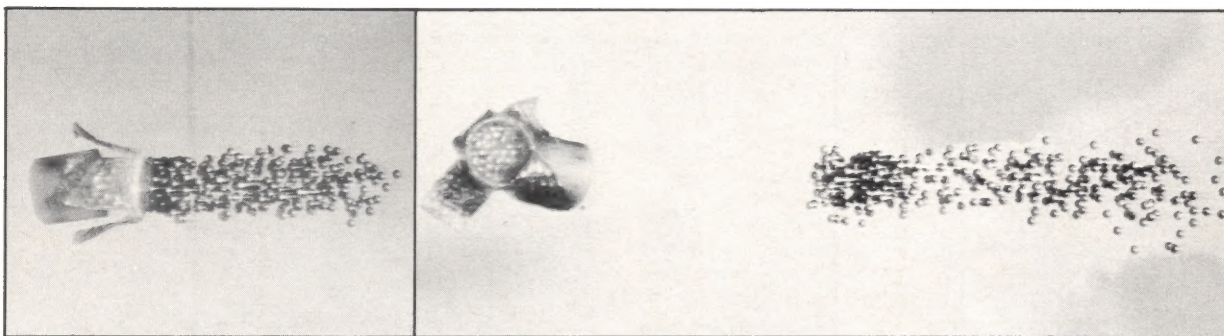

(Left) Ram-Wad and #7 1/2 shot charge photographed at 2 1/2 feet from *full choke* test barrel. (Right) Same components, 5 1/2 feet from muzzle.

TRAP PATTERN: *C-I-L Ram-Wads in trap loads give you dense, uniform shot strings. The combination of Ram-Wad and extra hard shot produces rangier patterns. Excellent for both singles shooting and handicap.*

C-I-L introduces the Ram-Wad— a revolutionary new two-piece wad design

Read how C-I-L's new Ram-Wad gives astonishingly uniform,
hole-free shot patterns—in all target loads

The principle of the Ram-Wad is quite simple.

When the powder ignites, the over-powder wad rams forward locking onto the tapered base of the shot protector.

As both pieces are wedged together, the side-walls of the over-powder wad expand hard against the shell casing.

The result is a *perfect seal*.

This allows hot propellant gases to thrust the Ram-Wad and shot out with the greatest possible force. No waste of gas or pressure. And no chance of gas leaking around wads and distorting your shot pattern.

Air trapped in the over-powder wad also pro-

vides a cushioning effect. This reduces recoil considerably.

Up front, the plastic shot protector surrounds the shot, protects it all the way down the barrel.

This keeps pellets round and undistorted; stops uncontrolled lateral dispersion, assures you a more uniform pattern.

The Ram-Wad is also reloadable. Its construction gives it exceptional strength for use more than once.

And unlike any other wad design, the Ram-Wad is rugged enough to withstand extreme winter cold. You'll get superb performance even in near zero and sub-zero weather.



Canadian Industries Limited
Ammunition and Firearms
P.O. Box 10, Montreal, Quebec

Sales Offices: St. John's, Newfoundland; Halifax, Nova Scotia; Montreal, Quebec; Toronto, Ontario; Winnipeg, Manitoba; Edmonton, Alberta; Calgary, Alberta; Vancouver, British Columbia